



53-06-60

PATENT

Docket No JCLA5710Date: 3-3-2000

Page 1

**ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231
ATTENTION: APPLICATION BRANCH**



Sir:

Transmitted herewith for filing is the patent application of

Inventor: Chuan-Yu Hsu; Chen-Hsiang Shih

For: INCREASING SCANNING RESOLUTION THROUGH DRIVING SYSTEM
CONTROL


Enclosed are:

- () Specification 10 pages.
() 1 Sheets of drawings
() Recordation Form Cover sheet with 2 pages assignment.
() A certified copy of Taiwan Patent Application No. _____ dated _____.
() **SIGNED** declaration and power of attorney.
() Return Prepaid postcard.

CLAIMS AS FILED

| FOR | NUMBER FILED | NUMBER EXTRA | RATE | FEE |
|--|-----------------|-----------------|--------|---------------|
| Basic Fee | | | \$690 | \$ 690 |
| Total Claims | 5 | -20 =0 | × \$0 | \$ 0 |
| Independent Claims | 2 | -3 =0 | × \$78 | \$ 0 |
| If application contains any multiple dependent claim (s), then add | | | \$260 | \$ 0 |
| TOTAL FILING FEE | | | | \$ 690 |

- () A check in the amount of \$690 cover the filing fee is enclosed.
() A check in the amount of \$40 to cover the assignment recording fee.
() A duplicate copy of this sheet is enclosed.

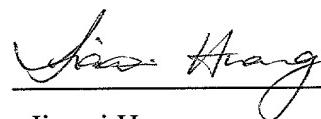

Jiawei Huang

Registration No 43,330

J.C. PATENTS, INC.
1340 REYNOLDS AVE., SUITE 114
IRVINE, CALIFORNIA 92614
(949)660-0761
FAX(949) 660-0809

Assistant Commissioner for Patents
Washington, D.C. 20231


CERTIFICATE OF MAILING BY "EXPRESS MAIL"

Docket No. : JCLA 5710
Applicant(s) : Chuan-Yu Hsu; Chen-Hsiang Shih
For : INCREASING SCANNING
RESOLUTION THROUGH DRIVING
SYSTEM CONTROL
"Express Mail" : EL502168135US
Mailing Label No.
Date of Deposit : March 3, 2000

I hereby certify that the accompanying

Transmittal in Duplicate; Specification 10 pages, 1 sheets of drawings; SIGNED
Declaration and Power of Attorney 2 pages; Recordation Form Cover Sheet and
Assignment 3 pages; Checks for Filing Fee(s); Return Prepaid Postcard

are being deposited with the United States Postal Service "Express Mail Post Office to
Addressee" service under 37 CFR 1.10 on the date indicated above and are addressed to the
Assistant Commissioner for Patents, Washington, D.C. 20231.

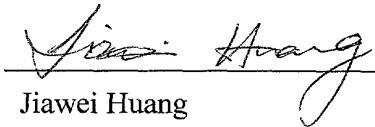

Jiawei Huang

INCREASING SCANNING RESOLUTION THROUGH DRIVING SYSTEM
CONTROL

5

BACKGROUND OF THE INVENTION

Field of Invention

The present invention relates to a method of controlling the scanning resolution of a scanner. More particularly, the present invention relates to a method of increasing the scanning resolution of a scanner through control of its driving system.

10 Description of Related Art

Due to the many recent advances in computer multimedia technologies, image-processing techniques have gone forward a giant step, leading to some innovative designs for computer peripheral products such as a scanner. In a few years' time, the scanner has developed from a palm-top device capable of scanning only black and white pixels to a full-color high-resolution scanning system. In general, the resolution of a scanner along the horizontal axis depends on the density of its charge-coupled device (CCD) while the resolution of the scanner along the vertical axis depends on the level of precision of its driving system.

To increase resolution along the vertical axis, the following methods are 20 conventionally adopted:

(a) driving system modification:

Fig. 1 is a timing diagram showing shift gate clock (SH) pulse and motor pulse (MTP) provided by the driving system of a conventional scanner. As shown in Fig. 1, one SH pulse period is represented by T1, which is the time needed to expose a

scanner's CCD once. Typically, a period T1 is about 10ms. The motor pulses are signals for controlling the forward rotation of a stepper motor. In general, the smaller the stepping angle of the stepper motor, the higher the resolution of the scanner is. Hence, by using a stepper motor having a small stepping angle, a high scanning resolution can be obtained. However, the cost of making a stepper motor with a small stepping angle is relatively high.

In addition, when the scanner is performing low resolution scanning operations, pulsing rate or pulse per second (PPS) of the stepper motor increases, leading to a low torque. Low torque increases the probability of stepping loss, thereby resulting in distortion of the scanned image.

(b) pixel compensation:

This method relies on displaying an image formed on the CCD in a single exposure twice on a screen in each exposure cycle. Hence, resolution is doubled. However, the image thus obtained is no longer the real optical resolution.

(c) micro-stepping motion control:

This method relies on the addition of an external driving circuit so that the original stepper motor is changed to a stepper motor capable of stepping forward in $\frac{1}{2}$, $\frac{1}{4}$ or $\frac{1}{8}$ of a step each time. Through the reduction of each forward step, resolution along the vertical axis is increased. However, the minimum micro-step that can be driven is ultimately limited by the external circuit. Moreover, when an ordinary step is subdivided into too many micro-steps, control becomes very difficult. The outcome is that distortion of the scanned image is unavoidable.

SUMMARY OF THE INVENTION

Accordingly, one object of the present invention is to provide a drive control system capable of increasing the scanning resolution of a scanner. The system operates by adjusting the timing relationship between motor pulse and shift gate clock pulse so that a low resolution driving system can achieve a high-resolution scanning.

A second object of the invention is to provide a driving system capable of increasing scanning resolution without increasing the production cost a scanner.

To achieve these and other advantages and in accordance with the purpose of the invention, as embodied and broadly described herein, the invention provides a method

10 for increasing the scanning resolution of a scanner through control of its driving system.

Shift gate clock pulses for the charge-coupled device of a scanner are provided so that one clock pulse cycle is a period of exposure of the charge-coupled device. Motor pulses are also provided. However, one motor pulse cycle is equivalent to a multiple of shift gate clock pulse cycles.

15 In a second embodiment, a method for increasing the scanning resolution of a scanner through controlling its driving system is provided. Motor pulse signals are supplied to the driving motor of the scanner. In addition, shift gate clock pulses are supplied to the charge-coupled device of the scanner. The motor pulses and the shift gate clock pulses are adjusted so that multiple motor pulses are emitted for every shift gate clock pulse going to the charge-coupled device.

It is to be understood that both the foregoing general description and the following detailed description are exemplary, and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings are included to provide a further understanding of the invention, and are incorporated in and constitute a part of this specification. The drawings illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention. In the drawings,

Fig. 1 is a timing diagram showing the shift gate clock pulse and the motor pulse provided by the driving system of a conventional scanner; and

Fig. 2 is a timing diagram showing the shift gate clock pulse and the motor pulse provided by the driving system of a scanner according to this invention.

10

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Reference will now be made in detail to the present preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers are used in the drawings and the description to refer to the same or like parts.

15

In order to increase scanning resolution of the vertical axis, scanner manufacturers often stress the importance of controlling the stepper motor in their research so that stepper motors capable of having ever-decreasing steps and ever-increasing stability are provided. However, they always come up against a limitation 20 when designing the driving system of their scanners.

In this invention, the scanning resolution of a scanner is increased by reducing motor pulse cycles per period. By reducing the number of motor pulse cycles per period, a plurality of shift gate clock pulses are generated for each forward step taken by the stepper motor.

Fig. 2 is a timing diagram showing the shift gate clock pulse and the motor pulse provided by the driving system of a scanner according to this invention. As shown in Fig. 2, a single motor pulse is emitted for every two shift gate clock pulses. Here, a shift gate clock pulse submitted to the charge-coupled device (CCD) still has a duration 5 T1. However, two shift gate clock pulses are generated for each motor pulse, and thus two scanning operations are carried out within each motor pulse cycle. Hence, near optical resolution of the scanners can be obtained without incurring additional cost for producing the scanner.

Tables 1, 2 and 3 below illustrate the improvement in scanning resolution 10 resulting from a modification of the driving system in a conventional scanner.

Exposure time: 10ms

Scanning mode: Grey scale

Optical resolution: 600 (horizontal axis) dpi

Table 1: Original design

| Resolution (Vertical Axis) | Motor Pulse Cycle | Number of Exposures | Pulse Per Second (PPS) |
|-------------------------------|-------------------|---------------------------|---------------------------|
| 75 dpi | 8 | 1 | 800 |
| 600 dpi | 1 | 1 | 100 |
| 1200 dpi | 0.5 | 1 | 50 |
| 2400 dpi | X | X | X |

15

In Table 1, the stepper motor in the driving system operates according to a 600 dpi specification. In other words, the stepper motor steps through 600 increments to move forward an inch. To attain a higher resolution of 1200 dpi in the vertical axis,

the motor must step forward half a step at a time. However, to attain an even higher resolution such as 2400 dpi is almost impossible unless a driving circuit capable of driving the stepper motor forward through one quarter of the original micro-step is available.

5 Exposure time: 10ms

Scanning mode: Grey scale

Optical resolution: 600 (horizontal axis) dpi

Table 2: Change in the driving system

| Resolution (Vertical Axis) | Motor Pulse Cycle | Number of Exposures | Pulse Per Second (PPS) |
|-------------------------------|-------------------|---------------------------|---------------------------|
| 75 dpi | 16 | 1 | 1600 |
| 600 dpi | 2 | 1 | 200 |
| 1200 dpi | 1 | 1 | 100 |
| 2400 dpi | 0.5 | 1 | 50 |

10 In Table 2, the stepper motor in the driving system has changed so that the motor now operates according to a 1200 dpi specification. In other words, the stepper motor steps through 1200 increments to move forward an inch. To attain a higher resolution of 2400 dpi in the vertical axis, the motor must step forward half a step at a time. However, when the scanner is performing a low-resolution scanning operation, 15 the number of pulses per second (PPS) is greatly increased. Since torque produced by the stepper motor drops when PPS is increased, distortion of the scanned image may occur.

Exposure time: 10ms

Scanning mode: Grey scale

Optical resolution: 600 (horizontal axis) dpi

Table 3: Driving system according to this invention

| Resolution (Vertical Axis) | Motor Pulse Cycle | Number of Exposures | Pulse Per Second (PPS) |
|-------------------------------|-------------------|---------------------------|---------------------------|
| 75 dpi | 8 | 1 | 800 |
| 600 dpi | 1 | 1 | 100 |
| 1200 dpi | 1 | 2 | 50 |
| 2400 dpi | 1 | 4 | 25 |

5 In Table 3, the stepper motor in the driving system uses the original design and operates according to a 600 dpi specification. In other words, the stepper motor steps through 600 increments to move forward an inch. To attain a higher resolution of 1200 dpi in the vertical axis, pulse cycle of the stepper motor is increased so that CCD exposures are conducted twice within each motor pulse cycle. When resolution of the 10 vertical axis is increased to 2400 dpi, pulse cycle of the stepper motor is further increased so that CCD exposures are conducted four times within each motor pulse cycle.

15 In summary, this invention provides a method of increasing scanning resolution by suitably adjusting the timing relationship between the motor pulse and the shift gate clock pulse that controls the number of CCD exposures. Hence, a low-resolution driving system is capable of producing a high-resolution scanning. A second advantage of this invention is that scanning resolution is improved without incurring additional cost in producing the scanner.

It will be apparent to those skilled in the art that various modifications and variations can be made to the structure of the present invention without departing from the scope or spirit of the invention. In view of the foregoing, it is intended that the present invention cover modifications and variations of this invention provided they fall within the scope of the following claims and their equivalents.

00000000000000000000000000000000

WHAT IS CLAIMED IS:

1. A method of increasing scanning resolution of a scanner through controlling its driving system, comprising the steps of:

providing shift gate clock pulses to a charge-coupled device such that one shift

5 gate clock pulse period corresponds to an exposure cycle for the charge-coupled device;
and

providing motor pulses to a motor such that one motor pulse period corresponds to a plurality of exposure cycles for the charge-coupled device.

2. The method of claim 1, wherein the motor includes a stepper motor.

10 3. A method of increasing scanning resolution of a scanner through controlling its driving system, comprising the steps of:

providing motor pulse signals to a driving motor of the scanner;

providing shift gate clock pulse signals to a charge-coupled device of the scanner; and

15 adjusting a timing relationship between the motor pulse and the shift gate clock pulse such that one motor pulse cycle corresponds to a plurality of shift gate clock pulse cycles.

4. The method of claim 3, wherein one shift gate clock cycle corresponds to an exposure cycle for the charge-coupled device.

20 5. The method of claim 3, wherein the motor includes a stepper motor.

ABSTRACT OF THE DISCLOSURE

A method of increasing the scanning resolution of a scanner through controlling its driving system. By suitably adjusting the timing relationship between motor pulses and exposure pulses, a low-resolution driving system can produce a high-resolution image with no additional production cost incurred.

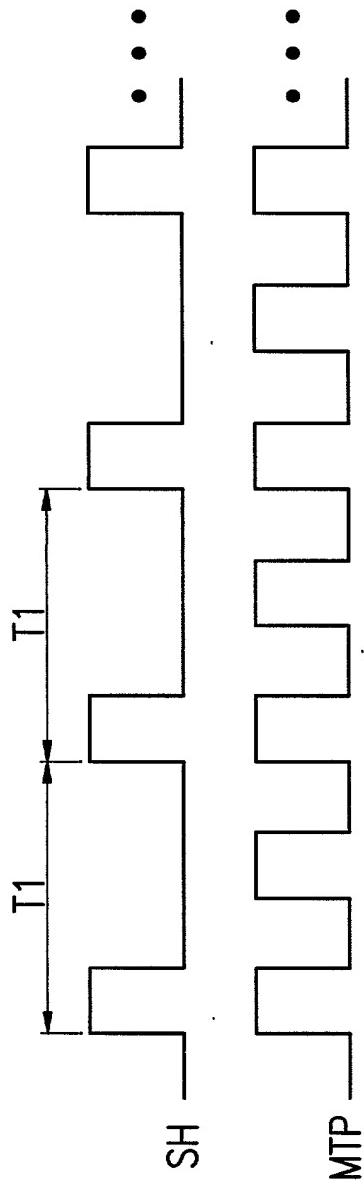


FIG. 1 (PRIOR ART)

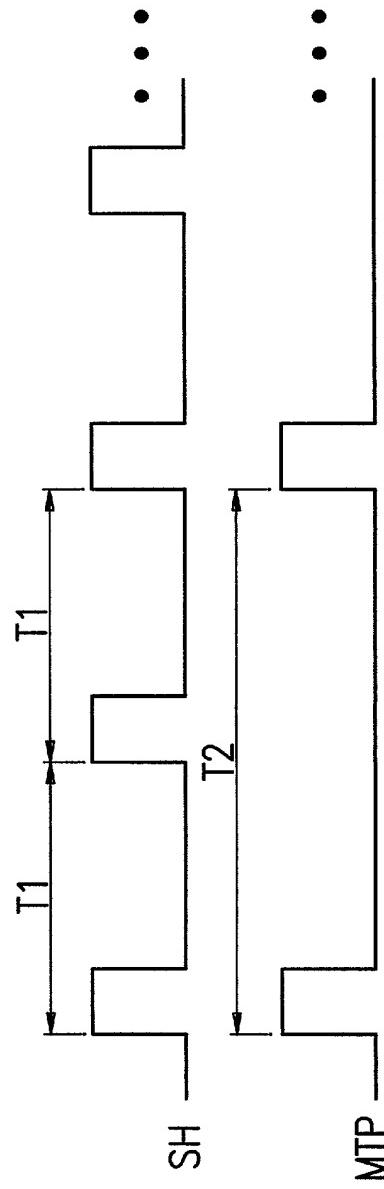


FIG. 2

COMBINED DECLARATION AND POWER OF ATTORNEY

As the below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name and that I believe I am an original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**INCREASING SCANNING RESOLUTION THROUGH DRIVING SYSTEM
CONTROL**

the specification of which

X is attached hereto.
was filed on _____
as Application Serial No._____ and was amended on_____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

| Number | Country | Date Filed(yyyy/mm/dd) | Yes | No |
|----------|----------------|------------------------|-----|----|
| 89100599 | Taiwan, R.O.C. | 2000/1/15 | | X |

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Jiawei Huang (Reg. No. 43,330) Charles C.H. Wu (Reg. No. 39,081)
Albert S. Penilla (Reg. No. 39,487) Raymis H. Kim (Reg. No. 39,462)
Peter B. Martine (Reg. No. 32,043)

SEND CORRESPONDENCE TO:

DIRECT TELEPHONE CALLS TO:
(Name and telephone number)

J.C. Patents, Inc.
1340 Reynolds Ave., Suite 114,
Irvine, CA 92614
(949) 660-0761

Jiawei Huang
(949) 660-0762

COMBINED DECLARATION AND POWER OF ATTORNEY CONTINUED

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Signature: Chuan-Yu Hsu Date: Feb. 21, 2000

Sole or First Joint Inventor: Chuan-Yu Hsu

Citizenship: Taiwan, R.O.C.

Residence and Post Office Address: 5F., No. 2-5, Chu-Tsun VII Rd., Science-Based Industrial Park, Hsinchu, Taiwan, R.O.C.

Signature: Chen-Hsiang Shih Date: February 18, 2000

Second Joint Inventor (if any): Chen-Hsiang Shih

Citizenship: Taiwan, R.O.C.

Residence and Post Office Address: No. 37-3, Yung-Feng Lane, Ho-Ming Village, Hsiu-Shui Hsiang, Chang-Hua Hsien, Taiwan, R.O.C.